

Slingco Cable pulling grips

For the installation of overhead conductors and cable in conduits, ducts and trenches

Slingco, a world-leading manufacturer & supplier of cable grips.

Founded more than 40 years ago, slingco remains a family-owned business but has evolved into an expert design and manufacturing operation, producing high quality cable grips, assemblies and more.





Slingco operates out of regional bases in the UK and USA, supplying products around the world, making heavy-duty cable and conductor installation a whole lot easier.


Features

- Heavy duty multi-weave construction
- Used for heavy duty pulling
- Suitable for bare steel, AL & CU conductor
- Colour coded for easy identification
- The MU type grip's triple-weave construction is ideal for heavy loads
- Cable grips are color coded for ease of identification
- Hand-woven with quality galvanized steel
- Perfect for stringing overhead transmission and distribution lines and heavy load pulls
- Ideal for new or old conductors
- The flexible eye connects with line pulling swivels for trouble free pulling applications

MU type high strength cable grip



| Part no. | Colour code | Conductor range (mm) | Amokabel conductor | A (mm) | B (mm) | C (mm) | D (mm) | Breaking load (kg/kN) |
|----------|---|----------------------|--------------------|--------|--------|--------|--------|-----------------------|
| ZCS1710 |  | 6-12 | CCSX25 | 7 | 102 | 965 | 720 | 3170/31.09 |
| ZCS1711 |  | 12-19 | CCSX62 | 8 | 127 | 1263 | 978 | 4760/46.68 |
| ZCS1712 |  | 19-25 | CCSX159 | 9 | 156 | 1537 | 1162 | 6395/62.71 |
| ZCS1713 |  | 25-32 | - | 13 | 165 | 1909 | 1470 | 11340/111.21 |

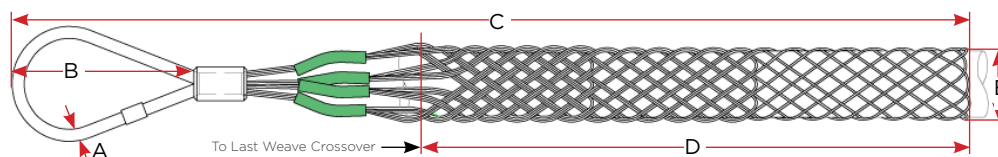

Important note: ensure fitting instructions are followed and always apply the recommended steel band for maximum grip of the conductor

Cable pulling grips

Selection chart

| Conductor stranding | OD (mm) | Type | Conductor name | Grip part no. | Colour | OD range (mm) | Swivel part no. |
|---------------------|---------|---------|-------------------------|---------------|--------|---------------|-----------------|
| 3/2.75 | 5.93 | ST/GZ | -- | ZCS1710 | Green | 6-12 | GGT001 |
| 3/2.75 | 5.93 | ST/AC | -- | | | | |
| 7/2.00 | 6.00 | SC/GZ | -- | | | | |
| 7/2.25 | 6.75 | AL | Jupiter/Baron | | | | |
| 7/2.50 | 7.50 | AL | Diamond/Chlorine/Leo | | | | |
| 6/1/2.50 | 7.50 | ACSR | Almond | | | | |
| 6/1/.093 | 7.50 | ACSR | Gopher | | | | |
| 3/4/2.50 | 7.50 | ACSR | Raisin | | | | |
| 7/2.75 | 8.25 | SC/GZ | Emerald/Fluorine/Libra | | | | |
| 7/3.00 | 9.00 | AL | Apple | | | | |
| 6/1/3.00 | 9.00 | ACSR | Ferret | | | | |
| 6/1/.118 | 9.00 | ACSR | Sultana | | | | |
| 4/3/3.00 | 9.00 | ACSR | Sultana/Swimming | | | | |
| 7/3.25 | 9.75 | SC/GZ | -- | | | | |
| 7/3.40 | 10.20 | SC/GZ | -- | | | | |
| 7/3.75 | 11.30 | AL | Helium | | | | |
| 6/1/3.75 | 11.30 | ACSR | Banana | | | | |
| 4/3/3.75 | 11.30 | ACSR | Walnut/Tennis | | | | |
| 6/1/.144 | 11.30 | ACSR | Mink | | | | |
| CCSX25 | 12.00 | ACS/CC | Amokabel CCSX25 | | | | |
| 7/4.50 | 13.50 | AL | Jade/ Hydrogen /Mercury | ZCS1711 | Brown | 12-19 | GGT001 |
| 7/4.75 | 14.30 | AL | Moon/Iodine/Jasper | | | | |
| 6/1/4.75 | 14.30 | ACSR | -- | | | | |
| 6/4.75 - 7/1.60 | 14.30 | ACSR | Cherry | | | | |
| 6/186 - 7/.062 | 14.30 | ACSR | Dog | | | | |
| CCSX62 | 15.80 | ACSR/CC | Amokabel CCSX62 | | | | |
| 19/3.25 | 16.30 | AL | Opal/Krypton/Neptune | | | | |
| 19/.128 | 16.30 | AL | Hornet | | | | |
| 30/7/2.50 | 17.50 | ACSR | Grape | | | | |
| 19/3.75 | 18.80 | AL | Pluto/Neon | | | | |
| 19/.149 | 18.80 | AL | Chafer | | | | |
| 30/7/3.00 | 21.00 | ACSR | Lemon | ZCS1712 | Blue | 19-25 | GGT001 |
| 19/.166 | 21.10 | AL | Cockroach | | | | |
| CCSX159 | 21.80 | AAAC/CC | Amokabel CCSX159 | | | | |
| 19/4.47 | 22.33 | AL | Ruble | | | | |
| 19/4.75 | 23.80 | AL | Taurus | | | | |
| 19/.183 | 23.80 | AL | Butterfly | | | | |
| 30/7/3.50 | 24.5 | AL | Lime | ZCS1713 | Yellow | 25-32 | GGT010 |
| 37/3.75 | 26.30 | AL | Triton | | | | |
| 37/.144 | 26.30 | AL | -- | | | | |
| 54/7/3.00 | 27.00 | ACSR | Mango | | | | |
| 61/3.25 | 29.30 | AL | Uranus | | | | |
| 54/7/3.50 | 31.50 | ACSR | Olive | | | | |

Important note: ensure fitting instructions are followed and always apply the recommended steel band for maximum grip of the conductor